

Automated Spray System Helps Cat Litter Producer Reduce Manufacturing Costs and Eliminate Customer Complaints



Problem:

A manufacturer of cat litter needed to apply precise volumes of two ingredients to the litter pellets during blending processes on a new production line. One chemical solution acts as a binder and a dust retardant. The other solution is a fragrance to improve odor control. Applying too little of these ingredients resulted in customer complaints. Applying too much was wasteful and since the ingredients are costly, it was a profit drain.


The manufacturer previously used air atomizing nozzles. Misting from the nozzles caused problems in the production area. Low transfer efficiency also resulted in customer complaints about the lack of fragrance. The manufacturer then changed to standard hydraulic nozzles. However, this required the dilution of the concentrated fragrance to achieve the proper application rates. This meant adding expensive blending equipment and an extra manufacturing step. The addition of more water to the litter also reduced the absorbing power of the pellets and the strength of pellet clumping.

Solution:

Spraying Systems Co.'s solution consisted of an AutoJet® Spray System equipped with PalsaJet® automatic spray nozzles. These nozzles are suitable for safely spraying alcohol- and solvent-based fluids in Zone 1 rated hazardous areas. Six of the nozzles apply the binder/dust retardant solution and one nozzle applies the fragrance. The nozzles are mounted in the hoppers above the blending equipment and are fed by separate supply units for the two liquids. Each liquid supply unit includes a single-stage progressive cavity pump, a variable frequency drive unit, a flow meter and other components to ensure consistent liquid supply to the nozzles.

The PLC-based spray control panel receives a 4-20mA signal indicating the processed tonnage per hour from the production line. Precision Spray Control (PSC) is used to automatically adjust the flow of ingredients as needed. The application rates for the two ingredients are controlled independently. The ability of the system to automatically maintain the proper dosage rates as tonnage varies from startup to full production is critical for peak production efficiency.

AutoJet Spray System used in the application of binder/dust retardant and fragrance solutions.

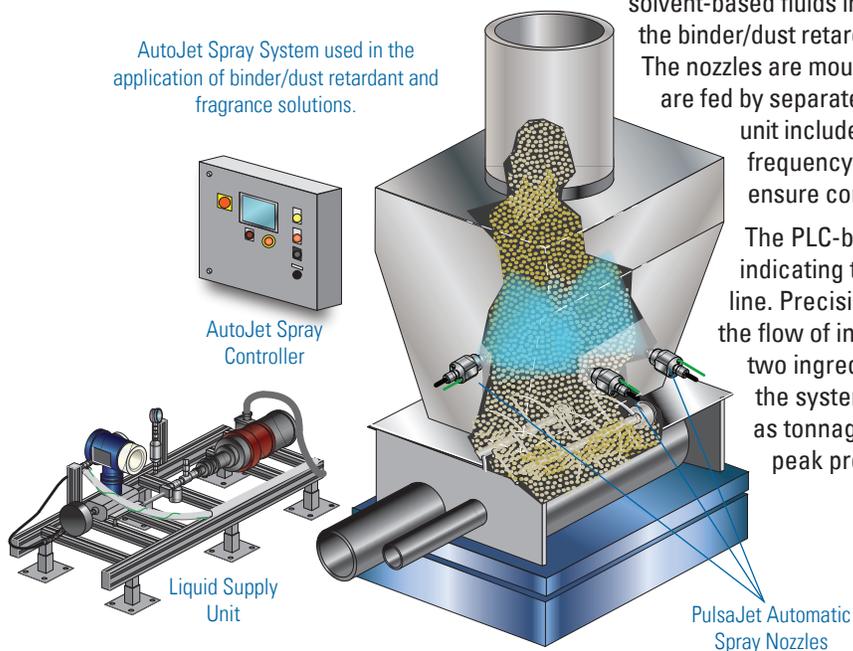



Automated Spray System Helps Cat Litter Producer Reduce Manufacturing Costs and Eliminate Customer Complaints – Continued

Results:

The AutoJet® Spray System ensures consistent application rates for both the binder/dust retardant solution and the fragrance no matter the tonnage of cat litter being processed. The system has eliminated the need for the high-maintenance liquid blending equipment and the extra processing step of diluting the fragrance. Maintenance downtime has been reduced, enabling an increase in production. A payback period of less than two years is estimated for the new spray system. In addition to the financial benefits, consistent quality is ensured and customer complaints have decreased.


A CLOSER LOOK AT THE SYSTEM

AA10000AUH-03-Z1 PulsaJet® nozzles add the binder and the fragrance to the cat litter pellets.



AutoJet Spray Control Panel provides easy control of nozzles and controls the liquid flow for both the binder solution and the fragrance.

Precision Spray Control

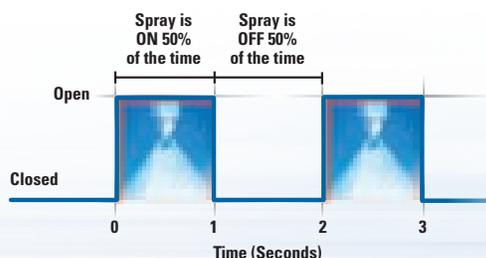

Precision Spray Control (PSC) involves turning nozzles on and off very quickly to control flow rate. This cycling is so fast that the flow often appears to be constant. With traditional nozzles, flow rate adjustments require a change in liquid pressure, which also changes the nozzle's spray angle/coverage and drop size. With PSC, pressure remains constant enabling flow rate changes without changes in spray performance. PSC requires the use of electrically-actuated spray nozzles and an AutoJet spray controller.



Spraying Systems Co.®
Experts in Spray Technology

North Avenue and Schmale Road, P.O. Box 7900, Wheaton, IL 60187-7901 USA

Tel: 1.800.95.SPRAY Intl. Tel: 1.630.665.5000

Fax: 1.888.95.SPRAY Intl. Fax: 1.630.260.0842

www.spray.com

